




123/125/127 are used to measure the moisture level in sawn timber (also cardboard, paper) and hardened materials (plaster, concrete and mortar). They display the moisture level. The instruments have an average adjustment for European wood based on a wood temperature of 20°C.

127 is 2 in 1 digital and analog moisture meter

DT-129 is a conductivity moisture instrument designed for use in wood.

- Large LCD display
- Automatically Temperature Corrected (ATC) Readings when used with the temperature probe(129)
- Readings with Moisture Probe or Hammer Electrode
- Readings with Integral Electrode Pins

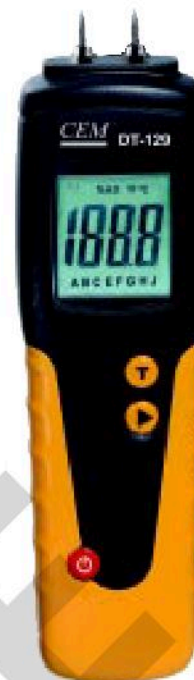

Built in Pins



Optional remote probe

Specifications

Measuring principle	Electrical resistance
Electrode length	8mm
Elektrodes	Integrated, replaceable
Measuring range	Wood: 6-44% (123/125/127); Wood: 6-99.9% (129) Material: 0.2-2.0% (123/125/127)
Display Accuracy	Wood: ±1% Material: ±0.05% (127)
Battery	3 x Cr 2032, replaceables; 2 x AAA (129)
Housing	Impact-proof plastic housing
Ambient temperature	0-40°C
Ambient moisture	0-85%



replaceable pin

Size(HxWxD): 123/127: 130mm x 40mm x 33mm


Weight: 99g

Size(HxWxD): 125: 140mm x 48mm x 33mm

Weight: 93g

Size(HxWxD): 129: 180mm x 50mm x 31mm


Weight: 175g



2 in 1 digital and analog display



Calibration and battery check

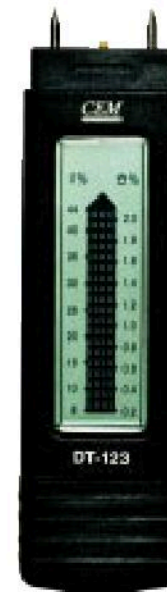

EMC
EN: 50081-1, 50082-1

