

CFM/CMM Thermo- Anemometer with built-in non-contact IR Thermometer measure remote surface temperatures to 932°F (500°C) with 30:1 distance to spot ratio and Laser Pointer.



Features

- Simultaneous display of Air Flow or Air Velocity plus Ambient Temperature
- Easy to set Area dimensions (cm²) are stored in the meter's internal memory for the next power on
- Resolution of 0.01m/sec
- 20 point average for Air Flow
- Super large (9999 count) LCD Backlit Display
- 3% velocity accuracy via low friction 2.83"D (72mm) ball bearing vane wheel on 3.9ft (120cm) cable
- Complete with vane sensor with 3.9ft (120cm) cable, 9V battery, and protective rubber holster

Specifications

Air Velocity	Range	Accuracy	8893	8894
m/s(meter per second)	0.40~30.00	±3% ±0.20m/s	*	*
ft/min(feet per minute)	80~5900	±3% ±40ft/min	*	*
km/h(kilometers per hour)	1.4~108.0	±3% ±0.8km/h	*	*
MPH(miles per hour)	0.9~67.0	±3% ±0.4MPH	*	*
Knots(nautical miles per hour)	0.8~58.0	±3% ±0.4knots	*	*
Air Temperature	14-140°F(-10-60°C)	±4.0°F(2.0°C)	*	*
InfraRed Temperature	-58 to -4°F(-50 to -20°C)	±9.0°F(5.0°C)	*	*
	-4 to 932°F(-20 to 500°C)	±2% reading	*	*
Air Flow	Range	Area		
CFM	0-999900	0-999.9 ft ²	*	*
CMM	0-999900	0-999.9 m ²	*	*

Large LCD display



EMC
EN: 50081-1, 50082-1
EN: 60825-1




20 point average for Air Flow

Resolution of 0.01m/sec



EMC
EN: 50081-1, 50082-1

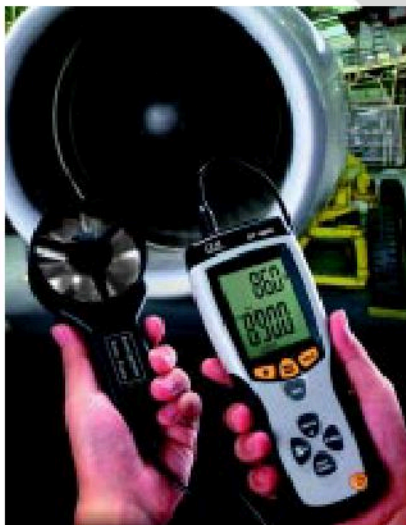

Size(HxWxD): 203mm x 75mm x 50mm

Weight: 280g

Accessories :

9V battery and NTC temperature probe, IR temperature probe, Anemo probe